



Electric Strikes

GK1250 Rim Strike Series

Preload Solution for Rim Exit Devices



SECURITY



The GK1250 series ANSI electric rim strike is surface mounted and designed for use with strength and durability for use with rim exit devices with a 3/4" (19mm) throw Pullman latchbolt. It features a latch monitor, and has a 3/4" (19mm) thick metal housing. No cutting on the frame is required for installation.

Preload

The GK1250 is designed with its **high preload release capability** that allows smooth operation even under varying loads on the door, such as air-conditioning pressure, changes in the weather, warped doors or doors with weather stripping.

Field Selectable for Fail-safe or Fail-secure


The GK1270 is field selectable for fail-safe or fail-secure operation, or for 12 or 24VDC.

Standard Features

- Field selectable 12 or 24VDC
- Latch monitor
- Up to 165 lbs (75Kg) of preload (GK1250)
- Field reversible fail-secure or fail-safe (GK1270)
- No frame cutting required - surface mounted
- Non-handed fully reversible

Patents, Approvals, and Listings

- UL listed: GK1270
 - Static strength: 1,500 lbs (680Kg)
 - Dynamic strength: 50 ft-lbs
 - Endurance rating: 250,000 cycles

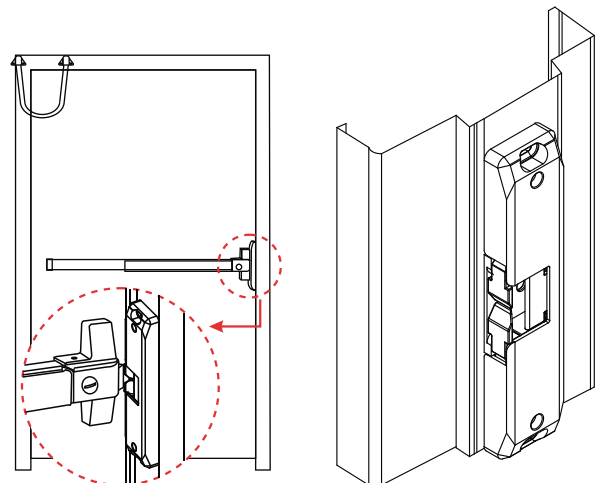





GK1250 Rim Strike Series

GK1250 Series ANSI Electric Rim Strikes

Models	Voltage (VDC)	Latch Monitor	Housing Thickness	Preload (Side Load) 165 lbs.	Mode	Static Strength (lbs.)	Finish
GK1250	12/24	●	3/4" (19mm)	●	Fail-safe	1100	US28 Satin aluminum, US32 Polished stainless steel
GK1270 	12/24	●	3/4" (19mm)	—	Field reversible fail-safe or fail-secure	1500	US28 Satin aluminum, US32 Polished stainless steel

GK1250 Series Dimensions

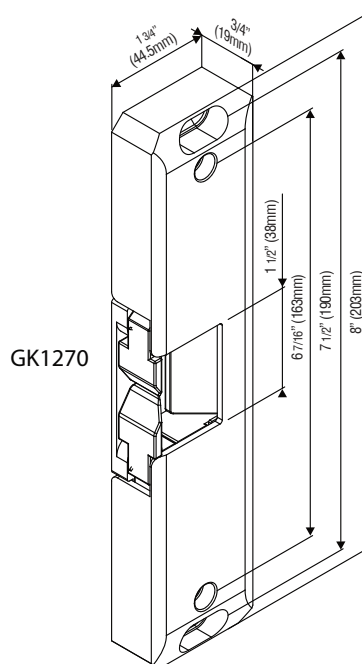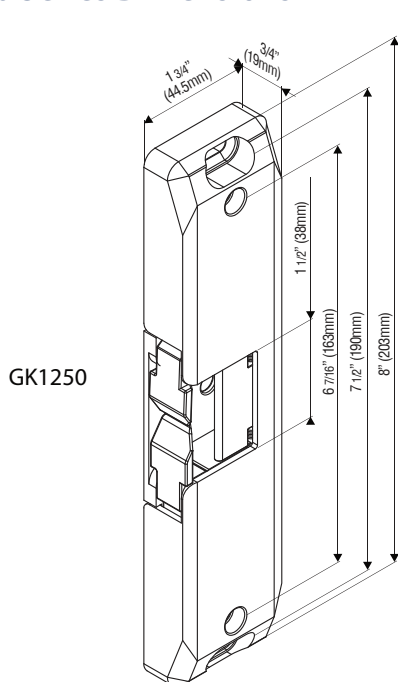

Changing Fail-safe / Fail-secure (GK1270 Only)

Fail-safe or fail-secure is field reversible by changing the position of screws.

