



Electromagnetic Door Holders

Reliable Door Control for Emergency Release



GD840S

GD850F

GEM electromagnetic door holders are designed for use with self-closing fire and smoke barrier doors. They usually use independently or with any fire or smoke detector system. Typical installations include hospitals, schools, and public buildings. Electromagnetic door holders can also be operated by manual release for safety and convenience.

Standard Features

- Standard voltage AC or DC
- Typical high holding force up to 80 lbs.
- No residual magnetism
- Swivel/Self-adjustable armature plate for easy installation
- Flush/Floor/Surface mounted
- Extension rods for increased operational alignment
- Manual release button allows to release the door at any time

Patents, Approvals, and Listings

- UL 228, ULC C228 listed: R21907 (GD900 series)
- NF S 61-937 compliant (GD840S, GD850F, GD860S)



ANSI Standard Electromagnetic Door Holders

Models	Voltage	Holding Force (lbs.)	Manual Release Button	Mount	Finish/Color	LED	Bond Sensor	Armature Plate Type	
*GD900F 	24 VAC/DC *(12 VAC/DC)	80	●	Floor	Black	—	—	Square	Swivel
*GD900WS 	24 VAC/DC *(12 VAC/DC)	80	—	Surface	Stainless steel	—	—	Square	Swivel
*GD900W 	24 VAC/DC *(12 VAC/DC)	80	—	Flush	Stainless steel	—	—	Square	Swivel
*GD900WE	24 VAC/DC *(12 VAC/DC)	80	●	Flush Surface	Stainless steel	●	—	Square	Swivel
GD970 	12/24VDC	32.9	—	Flush	Silver	—	—	Round	Swivel
	110VAC/220VAC	38.8							
GD970S 	12/24VDC	32.9	—	Surface	Silver	—	—	Round	Swivel
	110VAC/220VAC	38.8							
GD990 	12/24VDC	32.9	—	Flush	Stainless steel	—	—	Round	Swivel
	110VAC/220VAC	38.8							
GD990S 	12/24VDC	32.9	—	Surface	Stainless steel	—	—	Round	Swivel
	110VAC/220VAC	38.8							

*Special order for 12VAC/DC operation



European Standard Electromagnetic Door Holders


Models	Voltage	Holding Force (lbs.)	Manual Release Button	Mount	Finish/ Color	LED	Bond Sensor	Armature Plate Type	
*GD640S	24 VDC *(12 VDC)	70	●	Flush Surface	Stainless steel	●	—	Square	Swivel
*GD840S	24 VDC *(12 VDC)	80	●	Surface	Black	●	—	Round	Swivel or Self-adjustable
*GD850F	24 VDC *(12 VDC)	80	●	Floor	Black	●	—	Round	Swivel or Self-adjustable
*GD860S	24 VDC *(12 VDC)	80	●	Surface	White	●	—	Round	Swivel or Self-adjustable
*RM90	24VDC *(12VDC) Dual 12/24 VDC	550	—	Surface	White	—	Optional	Square	Fixed

*Special order for 12VDC operation




ANSI Standard Electromagnetic Door Holder Dimensions

GD900F

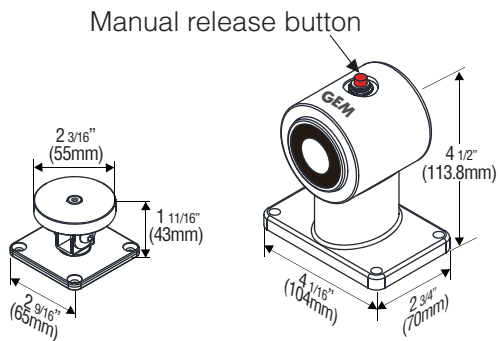


GD900WS

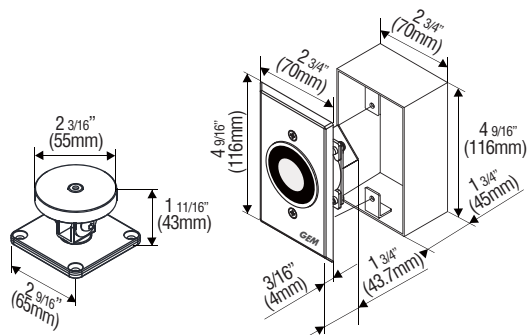


GD900WE
GD900W


(Without LED release button)

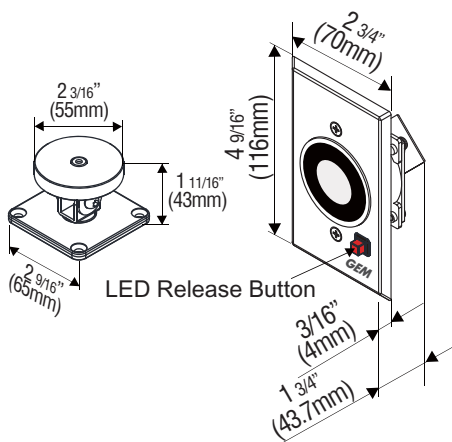


GD970

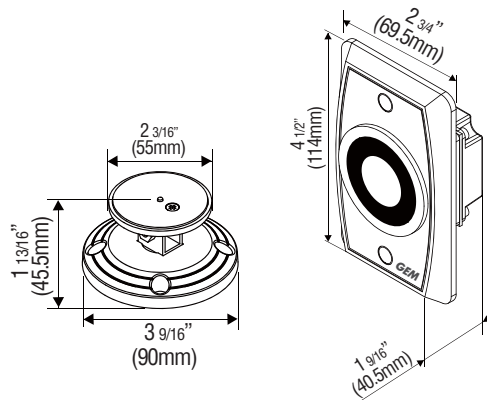


GD970S

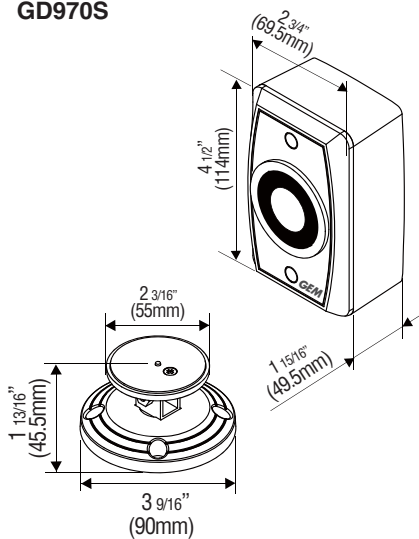

GD990

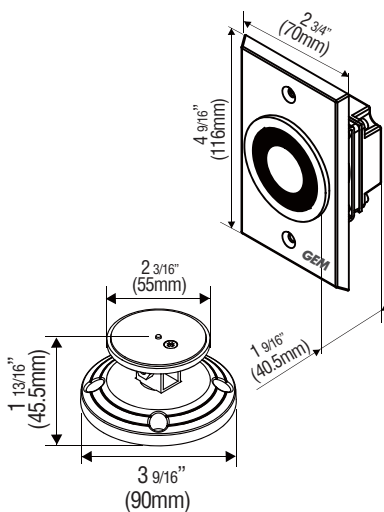


GD990S

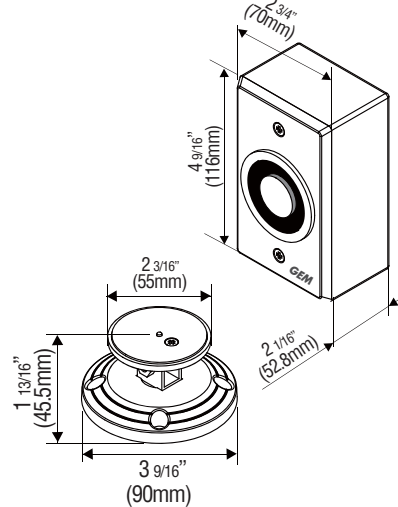


European Standard Electromagnetic Door Holder Dimensions


GD640S

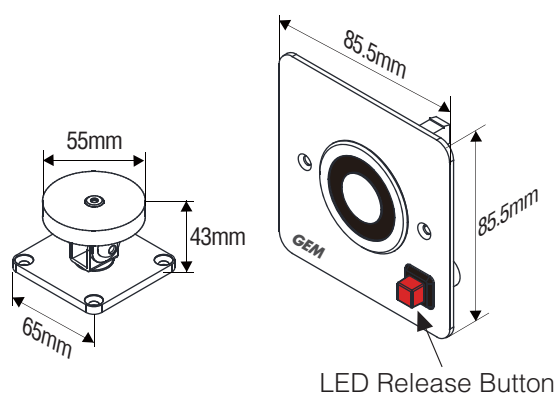


GD840S

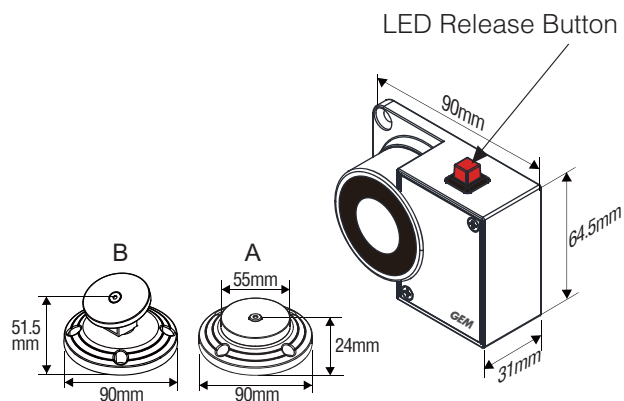


GD850F

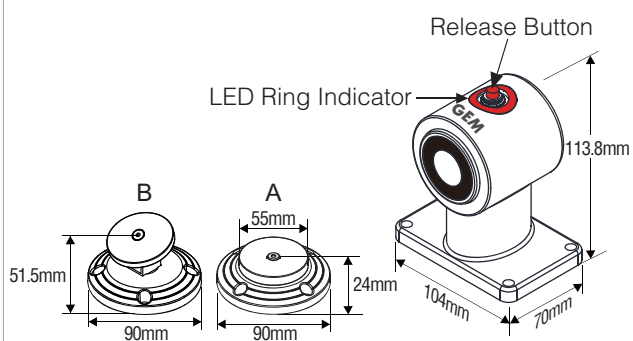

GD860S

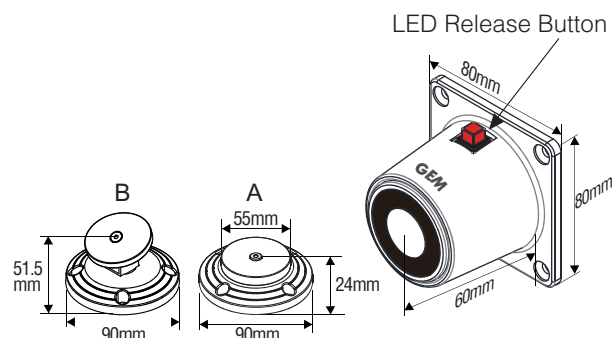

RM90

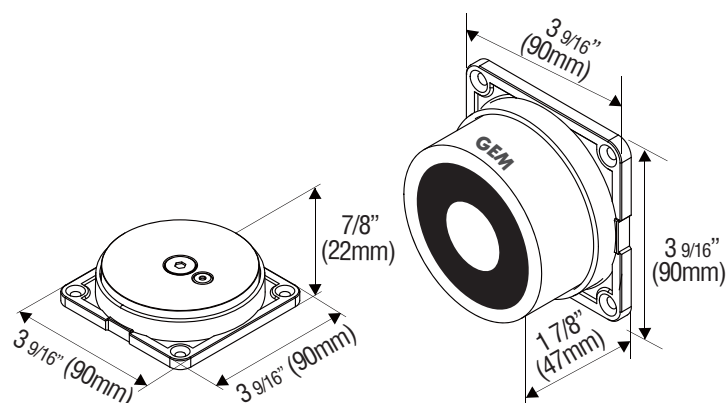

Notes:

A: Self-adjustable armature plate


B: Swivel armature plate

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original customer. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.


Extension Rods for Square Type Armature Plates

Extension rod(s) may be required to ensure proper installation by providing increased reach for the Armature Plate.

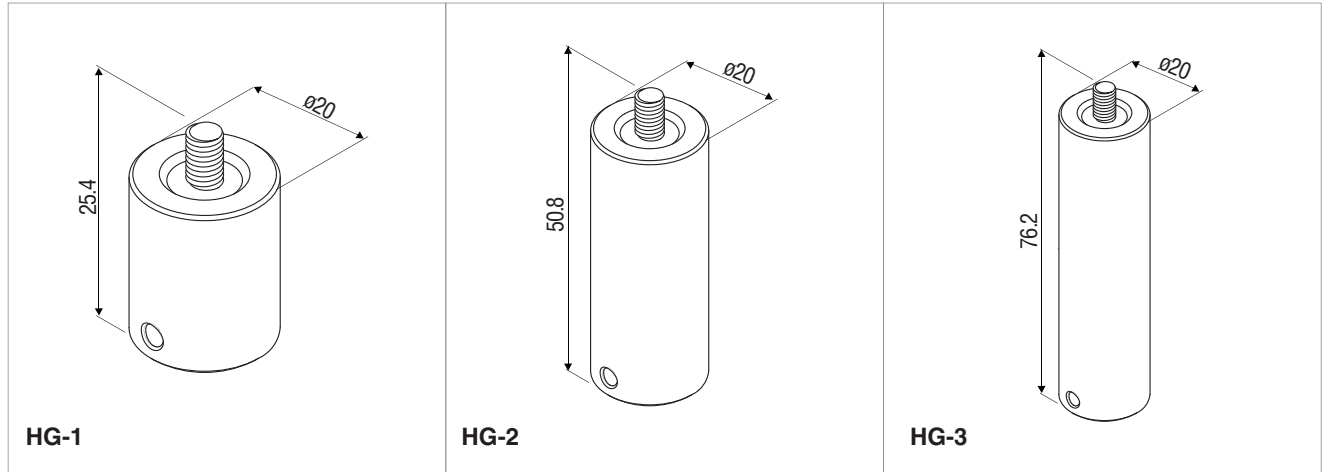

Note: RM90 is not available for use with extension rod.

Extension Rod Applications (Square Type Armature Plate Only)

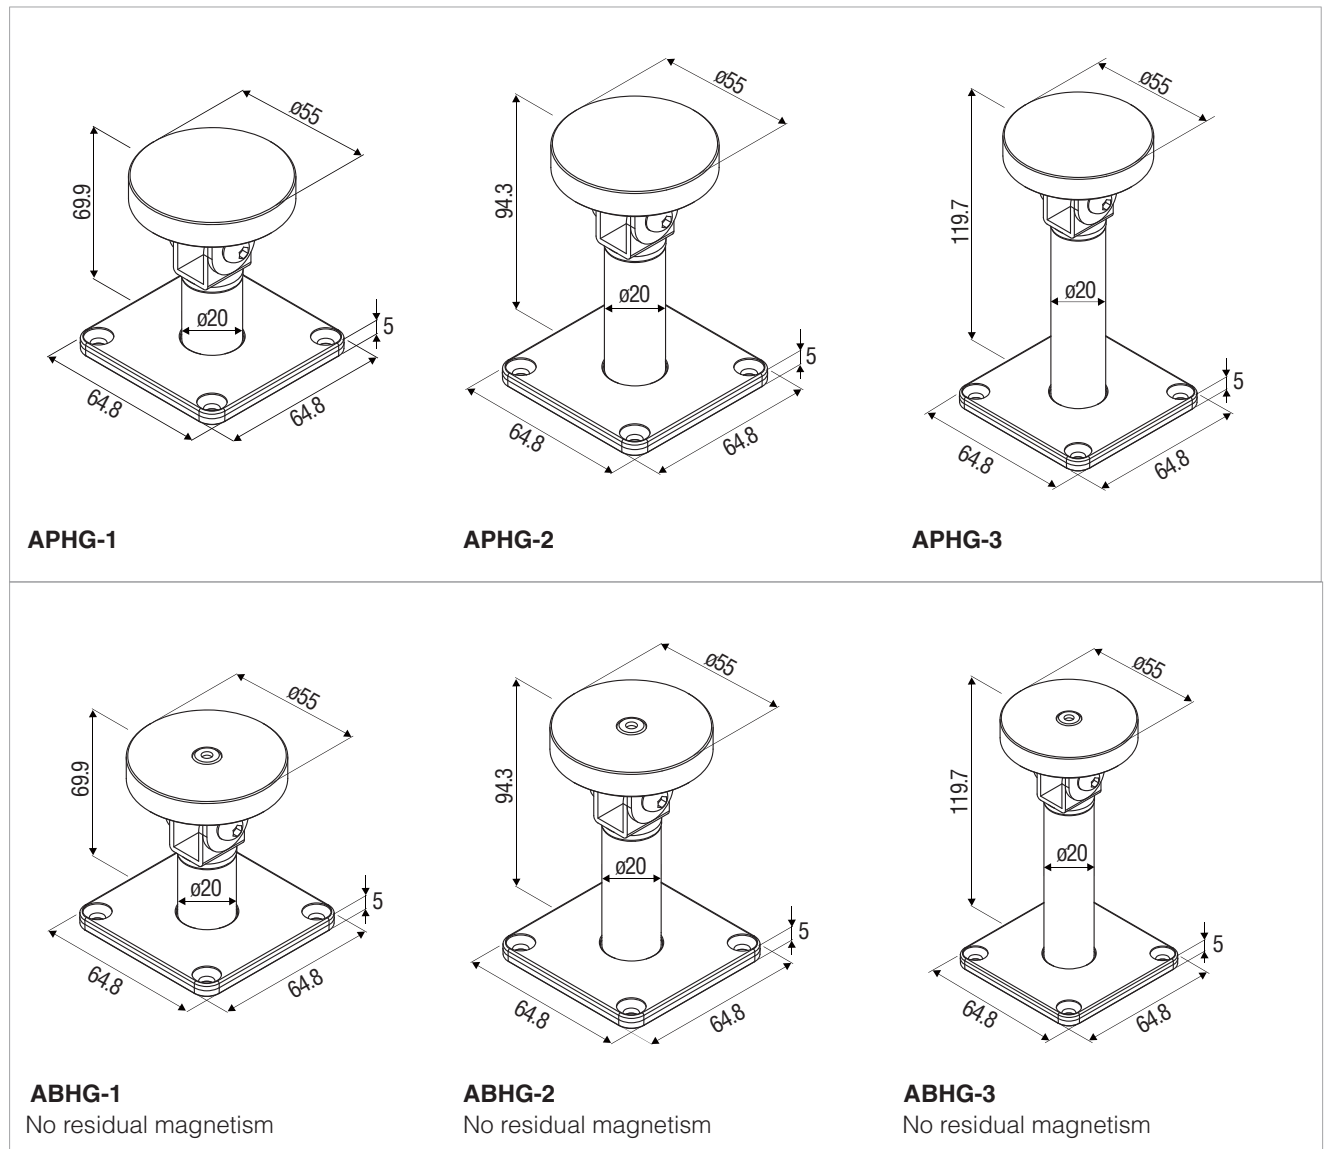

All dimensions in mm