

# SPECTRE

## VEHICLE IDENTIFICATION - AVI SCALABLE LONG RANGE READER



### COMPATIBILITY

- EPC Class 1 Gen 2 / ISO18000-63
- 865 - 868 MHz
- 902 - 928 MHz
- Ultrys v.2 software
- UHF antenna
- VESA 75 x 75 universal mounting kits



### LET YOUR IMAGINATION FLOW

Customization of the multicolor LED (RGB, 7 colors)



PRINTING OF YOUR LOGO using digital UV

### CERTIFICATIONS



### STANDING THE TEST OF THE TIME

The SPECTRE is the most robust on the market, with an enhanced vandal-proof structure IK10 certified to withstand knocks and malicious acts. It is IP66 and designed for outdoor installation in harsh environments: vibration, dust, heavy rain, sea air, etc.

### BETTER BY DESIGN

The strong lines and elegant style give the SPECTRE reader an extremely stealthy character to enhance your car park solutions. Its slimline design and lightness blend perfectly into all your installation environments.

The high-intensity LED, visible by day and night, makes it highly user-friendly.



### ACCEPT THE CHALLENGE OF FAST-TRACK SECURITY AT YOUR VEHICLE GATES

No more queues thanks to the SPECTRE UHF identification reader! It combines dynamic, elegant design with the latest technologies for security and scalability.

### SMOOTH AND SECURE VEHICLE ACCESS CONTROL

The SPECTRE reader rewrites the rules of security, making it more instinctive. It offers top level security by enabling you to sign your UHF credentials, while using encryption methods that are recognized and recommended by independent specialized bodies in information security (ANSI). The identification performance - up to 14 m / 45.9 ft\* - offers exceptional reading convenience and reliability for smooth vehicle access.

### SIMPLIFIED SCALABLE INSTALLATION

Up to 4 antennas can be connected to the SPECTRE reader to cover all security issues and all configurations: management of a mixed fleet of vehicles (light, heavy, motorcycles, etc.), identification on wide lanes or even distinct access control for 4 lanes of vehicles.

Your reader is configured in few seconds via USB/micro USB cable or UHF card. Its QuickSet mounting system is compatible with the VESA 75 x 75 standard and enables optimal installation, regardless of site configuration.

### GREEN CONCEPTION

Its green design means that SPECTRE reads fully passive credentials (no batteries). The reader can be operated by a ground loop or a presence sensor.



◀ SPECTRE VIDEO

www.stid-security.com


## SPECIFICATIONS

Operating frequency/standards	UHF - 2 versions: - 865 - 868 MHz: ETSI (Europe), Morocco (n°ANRT/DG/n°7-10 regulation), etc. - 902 - 928 MHz: 915 MHz FCC Part 15 (USA), Australia, New Zealand, etc.																		
Chip compatibility	EPC1 Gen 2 / ISO18000-63																		
Functions	Read only signed EPC / Read Write																		
Antenna(s)	1 to 4 antenna(s) Several possible configurations: - 1 integrated antenna + up to 3 external antennas - up to 4 external antennas																		
Reading distances*	Up to 14 m / 45.9 ft with the ETA label and the TeleTag® windscreen tag depending on vehicle type and installation conditions																		
Anticollision system	Yes																		
Communication interfaces	- TTL: protocol ISO2 (Data Clock) or Wiegand - RS232 with communication protocol SSCP - RS485 with communication protocols SSCP; OSDPT™ V1 (plain communication) & V2 (SCP secure communication)																		
Inputs / Outputs (I/O)	4 inputs (to manage the reader activation, ground loop, presence sensor...) / 4 outputs (to external traffic lights control...)																		
Light indicator	LED 7 colors (green, red, blue, orange, purple, turquoise, white) - OSDPT™ 4 colors (green, red, blue, orange)																		
Power requirement	Typ. 1 A / 12 VDC																		
Power supply	9 VDC to 36 VDC (12 VDC typical)																		
Material	Antenna: ABS and polycarbonate (ABS-PC) / Reader: aluminum																		
Dimensions (h x w x d) / Weight	348.7 x 279.2 x 45.1/83.6 mm / 13.7" x 11" x 1.8"/3.3" (general tolerance following ISO NFT 58-000 standard) - 2.65 kg / 93.5 oz																		
Operating temperatures	- 25°C to + 60°C / - 13°F to + 140°F - Indoor / outdoor - Humidity: 5 - 95 %																		
Resistance	IP66 - Weather-resistant with waterproof electronics / Reinforced vandal-proof structure IK10																		
Mounting	- Adjustable wall-mounting kit - Pole-mounted Compliant with VESA 75 x 75 universal mounting kits (optional)																		
Compliant cables	TNC Reverse coaxial cables (optional) - 1.5, 3, 9 and 12 m / 4.9, 9.8, 29.5 and 39.4 ft to connect antennas - Cables can be connected in series																		
Certifications	CE, FCC & UL																		
Part numbers	Reader version with integrated antenna: <table border="0"> <tr> <td>x: versions = 4 - 865 - 868 MHz 5 - 902 - 928 MHz</td> <td>Read only TTL .....</td> <td>SLA-Rx1-A/U04-xx/1</td> </tr> <tr> <td></td> <td>Read only RS232 .....</td> <td>SLA-Rx2-A/U04-5AB/1</td> </tr> <tr> <td></td> <td>Read only RS485 .....</td> <td>SLA-Rx3-A/U04-7AB/1</td> </tr> <tr> <td></td> <td>Read write SSCP RS232 .....</td> <td>SLA-Wx2-A/U04-5AA/1</td> </tr> <tr> <td></td> <td>Read write SSCP RS485 .....</td> <td>SLA-Wx3-A/U04-7AA/1</td> </tr> <tr> <td></td> <td>Read write OSDPT™ RS485 .....</td> <td>SLA-Wx3-A/U04-7OS/1</td> </tr> </table> Antenna version: 865 - 868 MHz .....ANT-SPECTRE-A 902 - 928 MHz .....ANT-SPECTRE-B	x: versions = 4 - 865 - 868 MHz 5 - 902 - 928 MHz	Read only TTL .....	SLA-Rx1-A/U04-xx/1		Read only RS232 .....	SLA-Rx2-A/U04-5AB/1		Read only RS485 .....	SLA-Rx3-A/U04-7AB/1		Read write SSCP RS232 .....	SLA-Wx2-A/U04-5AA/1		Read write SSCP RS485 .....	SLA-Wx3-A/U04-7AA/1		Read write OSDPT™ RS485 .....	SLA-Wx3-A/U04-7OS/1
x: versions = 4 - 865 - 868 MHz 5 - 902 - 928 MHz	Read only TTL .....	SLA-Rx1-A/U04-xx/1																	
	Read only RS232 .....	SLA-Rx2-A/U04-5AB/1																	
	Read only RS485 .....	SLA-Rx3-A/U04-7AB/1																	
	Read write SSCP RS232 .....	SLA-Wx2-A/U04-5AA/1																	
	Read write SSCP RS485 .....	SLA-Wx3-A/U04-7AA/1																	
	Read write OSDPT™ RS485 .....	SLA-Wx3-A/U04-7OS/1																	

## DISCOVER OUR COMPATIBLE TAG RANGE

For more security and user comfort, a wide range of services and options is available: windscreen mounting kit for TeleTag®, serigraphy, sequential or physical printing, self-destructible label...

TeleTag® has been designed to be installed especially behind the windscreen. Thanks to its smart mounting system, it can be installed either permanently or in a removable way.

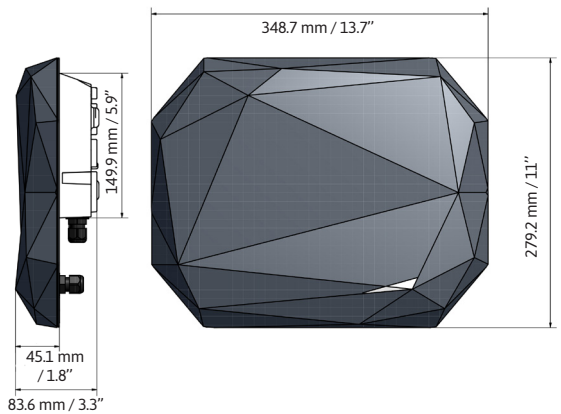

\*Caution: information about the distance of communication: measured from the center of the antenna, depending on the type of tag, size of the tag, operating environment of the reader, power supply voltage. RFID tag performance is influenced by its position on the windscreen, and depends on the windscreen type. The heat-reflective (or climate comfort) windscreens have a metallic film that blocks radio waves. Performances can be impaired. Use the non-treated area of the windscreen.

Legal statements: STid is a trademark of STid SAS. All other trademarks are property of their respective owners. This document is the exclusive property of STid. STid reserves the right to stop any product or service for any reason and without any liability - Noncontractual photographs.

### Headquarters / EMEA

13850 Gréasque, France  
Tel.: +33 (0)4 42 12 60 60

### PARIS-IDF Office

92290 Châtenay-Malabry, France  
Tel.: +33 (0)1 43 50 11 43

### STid UK Ltd. LONDON

Hayes UB11 1FW, UK  
Tel.: +44 (0) 192 621 7884

### STid UK Ltd.

Gallows Hill, Warwick CV34 6UW, UK  
Tel.: +44 (0) 192 621 7884

### NORTH AMERICA Office

Irving, Texas 75063-2670, USA  
Tel.: +1 469 524 3442

### LATINO AMERICA Office

Cuahtémoc 06600 CDMX, México  
Tel.: +521 (55) 5256 4706

### AUSTRALIA / APAC Office

Ultimo, Sydney NSW 2007, Australia  
Tel.: +61 (0)2 9274 8853

info@stid.com

www.stid-security.com