

Proximity Readers **Standalone EASIPROX Series**



DG-120R
ANSI Standard



EASIPROX-980-40
ANSI Standard

Standard Features


- 2000 Proximity cards/Tokens
- LED indicators for status and programming feedback
- Fail-secure or fail-safe capable
- Non-volatile memory protects programmed information in case of power failure
- Request to Exit input

Specifications

Voltage	12 VAC/DC
Reader Output	NC/COM/NC, Max. 5A/250 VAC
Read Range	10 to 15 cm
Reader Frequency	125KHz
Temperature	-20°C~70°C
Humidity	5%~95% (Non-condensing)
Reader Housing	Plastic ABS
Color	Black (EASIPROX-980-40) Navy blue (DG-120R)

Dimensions

DG-120R

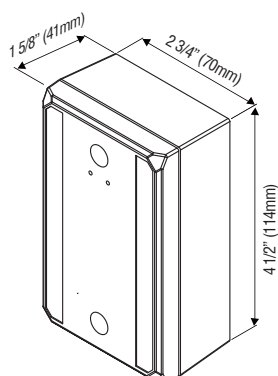

EASIPROX-980-40

