



35ft Retro-Reflective Photoelectric Beam Sensor

E-931-S35RRQ

Range: Up to 35ft (11m)

Features:


- For outdoors gates, garage doors, etc.
- Operates from 12~240VDC, 24~240VAC.
- Weatherproof (IP 66) construction for indoor/outdoor usage.
- Pre-wired 6ft cord.
- Bracket and mounting hardware included for both sensor and mirror.
- Adjustable sensing distance.
- Compact size.

Specifications

Model	E-931-S35RRQ
Type	Retro-reflective
Sensing range	0.5'~35' (0.2~11 m)
Voltage supply	12~240 VAC/VDC
Current draw	40mA@12VDC
Response time	10ms (max)
Light source	IR LED
LEDs	Yellow LED (standby) Red LED (trigger)
Trigger output	SPDT relay output (NO/NC/COM)
Switching capacity	1A@120VAC / 2A@30VDC
Enclosure	IP66 weatherproof
Ambient temperature	-4°~131°F (-20°~55°C)
Mounting brackets	Included




Dimensions:

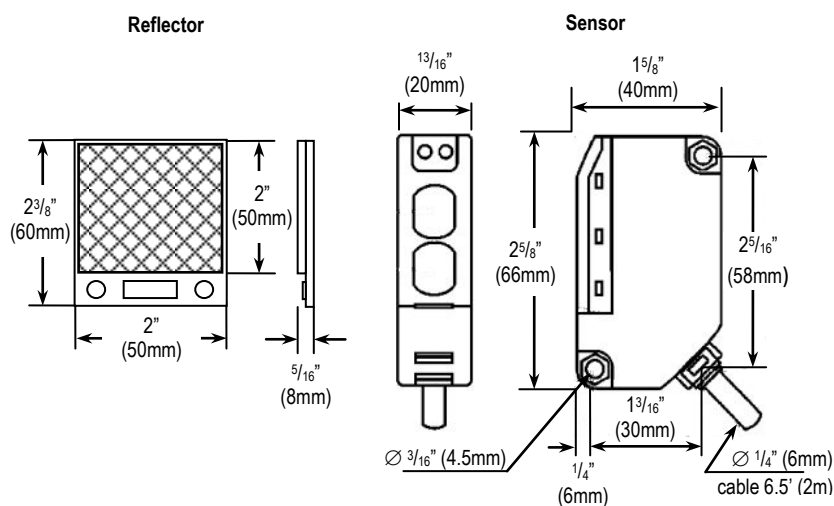


Included:


E-931-S35RRQ
Transmitter/Receiver



E-931ACC-BLS1Q
Sensor Mounting Bracket



E-931ACC-BR
Reflector



E-931ACC-BLR1
Reflector Mounting Bracket

