


SC517/WH or BR/MULTI/G3/EN


SURFACE CONTACT

CQR
First choice for quality

System5
APPROVED

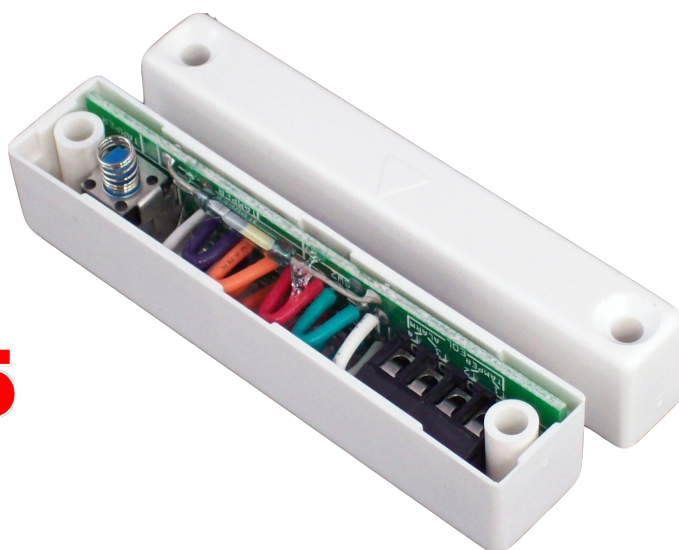

- 4 Terminals
- Microswitch tamper
- Selectable end of line resistor
- Can use own resistors
- Available in white or brown
- Can be fitted in double pole systems
- Can be used on double door configuration
- Magnetic Interference Detection
- Contact spacers available



Product codes

Code	Description
SC517/WH/MULTI/G3/EN	Surface Multi Contact Grade 3 White
SC517/BR/MULTI/G3/EN	Surface Multi Contact Grade 3 Brown
SC51X/SPACER/WH	SC513 / SC517 5mm Spacer pk 10

Technical data

Connections	4 Terminals
Switches	2
Pull-in Gap	10mm
Material	High Impact Polystyrene
Contact Size	65 x 13 x 13mm
Magnet Size	65 x 11 x 13mm
Contact Form	SPST form A
Voltage Range	12Vdc

Switching Current	500mA @ 12Vdc
Contact Material	Rhodium
Colours	White or Brown
Tamper	Microswitch
Magnetic Immunity	Yes
Standards	EN50131-2-6 Grade 3
Environmental Class	II

Rev. 2/7/2018



www.cqr.co.uk

info@cqr.co.uk

Sales: +(0)151 606 1000 Tech: +(0)151 606 6311

CQR Fire & Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH, UK



Scan or click for online

